


+  
**INK AGITATOR**

+  
+

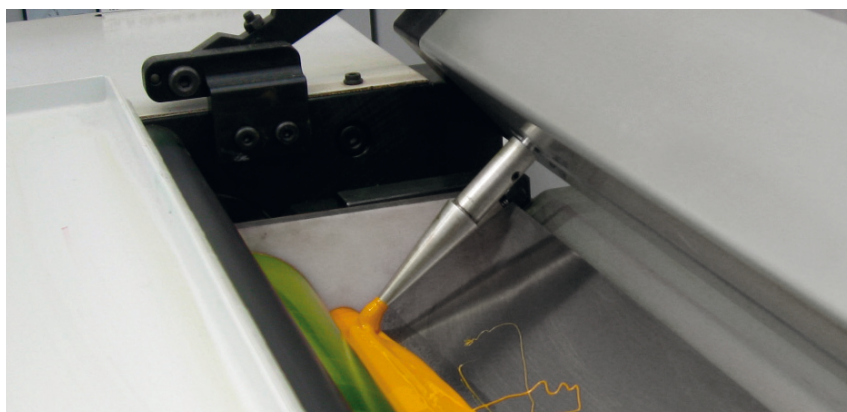

User friendly solution to avoid that the ink „stands still“, especially with the use of high viscose UV-inks.

**Optimal dispersion in the ink duct**

The ink agitator helps to disperse the ink equally in the whole ink duct and moves the ink towards the duct roll.

**Easy installation, even for retrofit**

The ink agitator is available in different lengths and makes, type 1 with revolting finger, type 2 with static finger. Mounting parts are available for different machines.

**Operation**

The movement intervals are controlled by a programmable device and can be individually set to the different needs of any user. Switching on and off of individual agitators can be done through separate switches.

**Technical data**

Drive: pneumatic cylinder (max. 0.6Mpa pressure)  
Adjustable speed: min. 50mm/s max. 200mm/s

**Control device**

Voltage: 24 VDC +20%–15%  
Entry current: 6.0 mA  
Maximum power consumption: 7.5W

- + Ink Agitator with pneumatic drive
- + Adjustable speed
- + Simple fixation
- + Easy retrofitting

The ink agitators are a perfect extension of our ink duct systems. As a matter of course they also fit with ink ducts of other manufacturers.